

CONTROL 
TECHNIQUES



COMMANDER S

MAKING SIMPLE APPLICATIONS, SIMPLE.

AC DRIVES, GENERAL PURPOSE

DRIVE OBSESSED



COMMANDER S

0.18 to 4 kW (0.25 to 5 hp)
1Ø 100 & 200 V, 3Ø 200 & 400 V
Linear V to F, square V to F, resistance
compensation

Take charge of motor control and energy savings with the latest addition to the Control Techniques portfolio. With a feature set optimised for simple motion cycles, Commander S provides a cost-effective solution for applications that require plug and play convenience straight from the box.

Commander S is the first drive to come with an app interface as a standard feature. The Marshal app is our revolutionary way to interface with the drive covering commissioning, monitoring, diagnostic and support.



Easy to install

The sleek curved design of Commander S optimises component layout for a small footprint and easy access to terminals. The click-on/click-off DIN rail mount makes installation remarkably easy.



Free 5 year warranty*

Our Commander S series is built and verified to be robust. In fact, it is so reliable we are confident enough to supply it with a free five-year warranty.

*Warranty terms and conditions apply.



Easy to use

Using our new Marshal app (Android/iOS) your drive will be up and running in under 60 seconds.



Reliable

Durability is at the core of Commander S' design, guaranteeing performance throughout its whole lifetime.



Cost effective

Equipped with unique features designed to save you time, energy and money.

**GENERAL PURPOSE
MAKING SIMPLE
APPLICATIONS,
SIMPLE.**



Fan, Pump, Compressor Applications



- Improved energy efficiency during periods of low demand
- PID functionality makes advanced control easy and efficient without the need of an external controller
- Easily avoid equipment resonant frequencies and reduce high vibration levels by using the skip frequency
- Catch an already spinning motor to reduce start-up time and increase productivity
- Motor thermal protection prevents overheating of the motor during operation



Moving Applications

conveyors, treadmills, automatic doors & barriers



- Reliable speed control with onboard communications
- S-ramp acceleration / deceleration profiling provides smooth speed transitions minimising machine jerk
- Linear V to F with a controllable boost to get the machine running
- Drive overload capacity up to 150% for increased acceleration or load changes
- DC braking with stop indication used to stop the motor quickly



Processing Applications

mixers, crushers, agitators, centrifuges, kneaders, spinning & braiding machines for textile




- Ease of integration to external PLC or other management systems with on board communications
- Stability optimizer for improved motor control
- Resistance compensation for excellent torque performance
- Built-in EMC filter effectively reduces electromagnetic interference

MARSHAL REVOLUTIONISE THE WAY YOU INTERFACE WITH YOUR DRIVE

Control Techniques has a long tradition of challenging the status-quo with innovative ideas and making a profound impact in the drives industry. And we've done it again with Marshal: Control Techniques is the 1st drive supplier to implement the NFC technology as standard on a drive and offer the Marshal app interface at no extra cost.

Marshal is your drive expert in the field. This rich content interface means you can commission, clone, diagnose issues with and monitor the drive in just a few screen taps.

**TAP: JUST BRING YOUR PHONE NEAR THE
NFC LOGO TO CONNECT TO THE DRIVE**





Powered by NFC* technology, the data transfer between the drive and the mobile device takes less than 0.5s.



* NFC - Near Field Communication

MARSHAL YOUR DRIVE EXPERT IN THE FIELD

Commissioning

- Power off or on commissioning (even in the box)
- FastStart – assisted commissioning. Only 4 simple steps to get you up and running
- Advanced features available in parameter setting
- Pre-set application configurations

Cloning

- Parameters can be easily transferred from one drive to another - just tap to write as many drives as you want
- Back-up and restore the configuration via the app

Share

- Share configuration via Outlook, OneDrive, WhatsApp etc.
- Shared configurations are compatible with Marshal & Connect (our PC commissioning tool)
- Export configuration to PDF format

Offline capabilities

- Create new configurations in the app
- Open existing projects to review/change parameters





Diagnostics

- Guided diagnostics for the system even without drive alarms or trips
- Diagnostics available with power off or on
- Get support with drive alarms within the app
- Error log & active error diagnostics – view active and historical error info
- Differences from default – compare configuration against factory defaults

Registration


- Activate the 5 Year Warranty via the app
- Access & download support materials via your CT account

Monitoring and security

- Quick view of parameter settings & drive status
- Restrict access to drive configuration via PIN
- Quick visualisation of I/O, motor, and speed settings

Contact us

Access to worldwide distribution network and local drive centres for buying and technical support

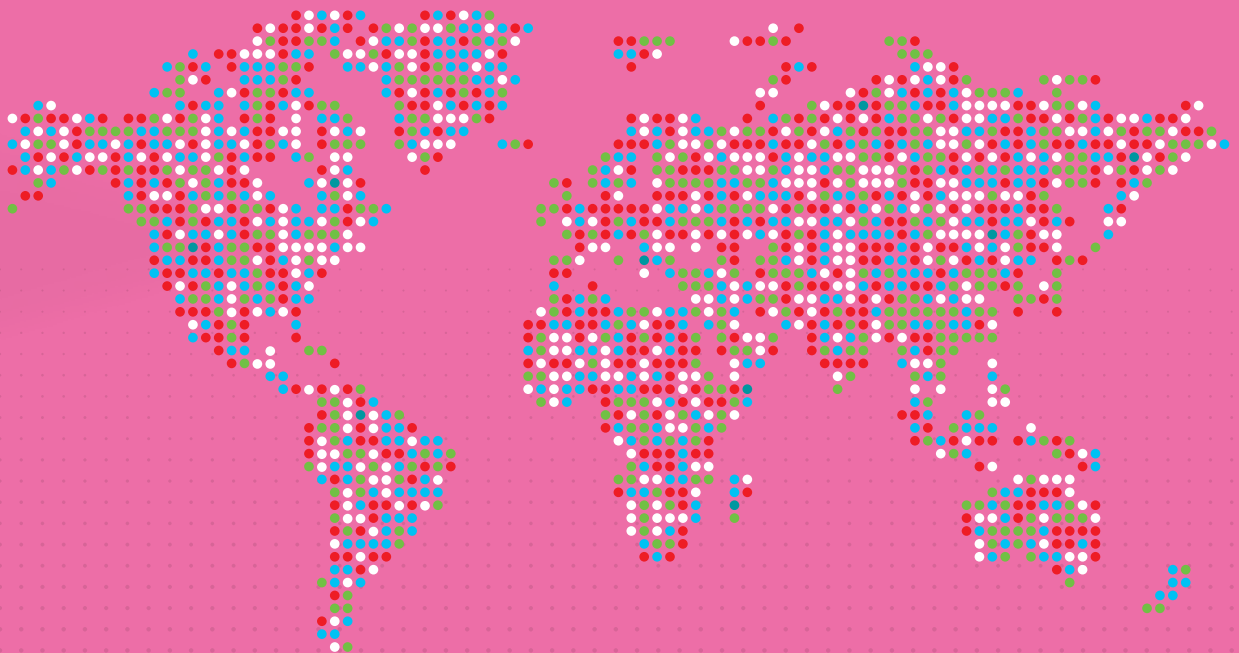

COMMANDER S



Cost effective

- Intelligent fan control reduces energy usage
- Easy integration to automation via the onboard ModbusRTU
- Integrated C1 EMC filter for residential installations saves space and cost
- Environmentally friendly – meets ECO design regulations



Easy to install

- Simple to fit with click on/click off DIN rail mounting
- Angled and offset screw terminal connectors for easy access and fast installation
- The small footprint and side-by-side installation saves cabinet space



Easy to use

- Marshal App interface enables drive set-up in only 60s
- Simple setup routines tailored to your application
- FastStart commissioning menu – only 4 simple steps to get your motor running
- Full flexibility in choosing your preferred interface; Marshal App, drive keypad, Connect PC Tool
- A PIN can be set on the drive or Marshal to restrict unwanted access



Reliable

- 100% conformal coating ensures moisture, corrosion and dust protection
- Free 5 Year Warranty gives peace of mind
- Latest generation of components from trusted suppliers, for robust performance and long term reliability
- Keep running by default allows the motor to continue to operate even during unusual loading or operating conditions



KEY USABILITY FEATURES

Accessible NFC location for communicating with mobile app MARSHAL

Fixed display with 4 control buttons for quick and easy commissioning and for monitoring drive performance

Drive identification information clearly marked


Rating information laser printed on the side of the drive

RJ-45 connector for ModbusRTU communication

Angled and offset screw terminal connectors for easy access

Internal EMC filter for C3 or C1 requirements. C3 filter can be disconnected if necessary.



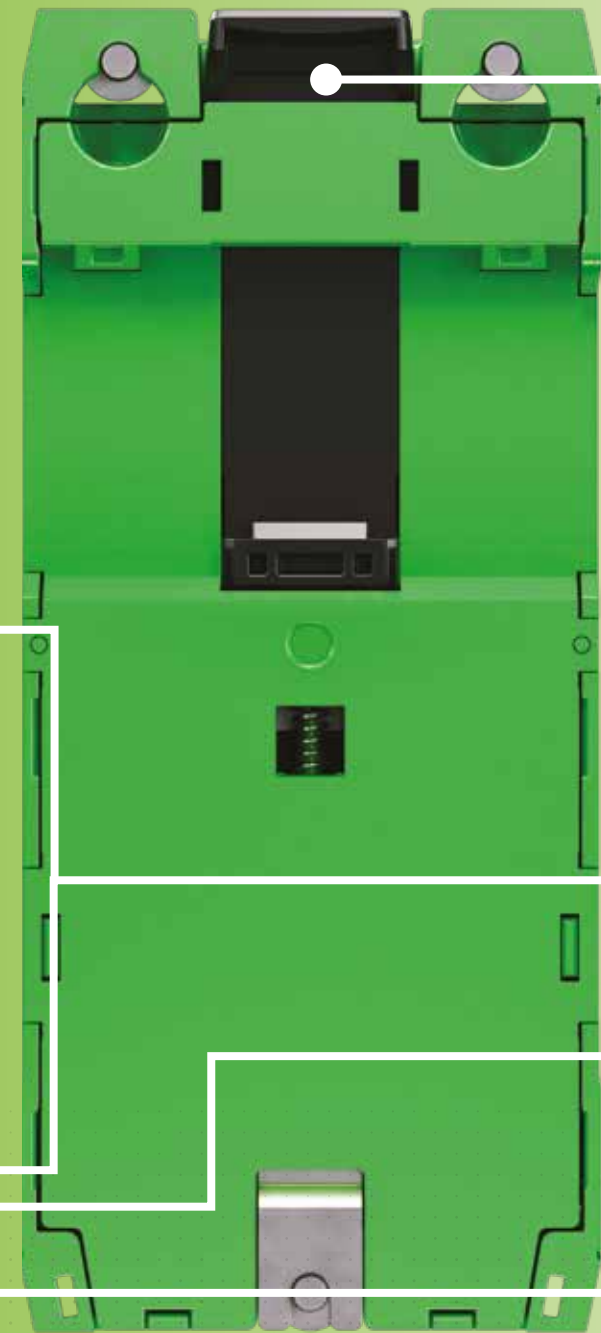

Click-on/click-off DIN rail mounting

AND / OR

Installation with bolts with washer.

Drive drops down into position for a secure installation

Finger proof power and relay screw terminals

Labelled power terminals

Ground / protective earth connections

FastStart

STEP BY STEP ASSISTANCE TO

There are only 4 simple steps to take to get your motor running:

1

Motor

Confirm/change motor information: voltage, current, rated speed, power factor

2

Control

Set-up how the drive speed is controlled: via control terminals or keypad, and how to start the drive

via your preferred interface

Full flexibility in choosing the interface: Marshal on your mobile phone, the integrated drive keypad or Connect on a PC.



Marshal



Keypad

GET YOU UP AND RUNNING

3


Speed

Input the max & min speed you want the motor to turn at and the acceleration and deceleration time

4

Confirm

Summary of settings.
Drive ready to run

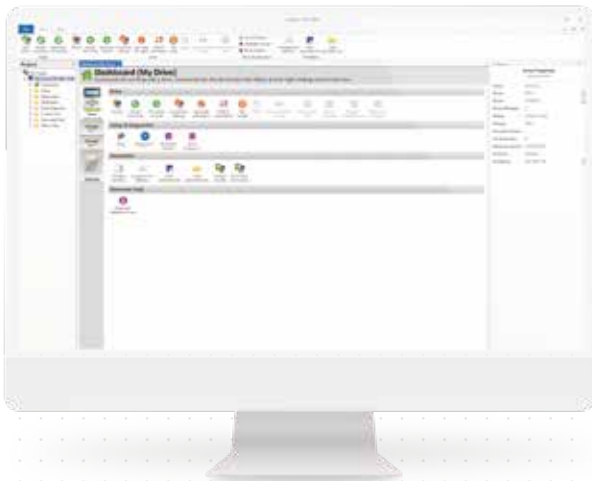

Connect

Connect offers an easy way to commission the drive on your PC.

The dynamic drive logic diagrams allow the visualisation and control of the drive in real time. The parameter browser enables viewing, editing and saving of parameters as well as importing parameter files from other drives.

Connect is a one tool interface for all CT drives.

COMMANDER S

SPECIFICATIONS

Power & control	
Supply requirements	100 V drive: 100 V to 120 V $\pm 10\%$ 200 V drive: 200 V to 240 V $\pm 10\%$ 400 V drive: 380 V to 480 V $\pm 10\%$ Maximum supply imbalance: 2 % negative phase sequence (equivalent to 3 % voltage imbalance between phases)
Power range	0.18 to 4 kW / 0.25 to 5 hp
Input frequency range	45 to 66 Hz
Output frequency/speed range	0 to 300 Hz
Switching frequency range	4 kHz or 12 kHz
Heavy duty overload capability	150 % for 60 s (from cold), 150 % for 8 s (from hot)
Operating modes	Linear V to F, square V to F, resistance compensation
Stopping modes	Coast, Ramp, Ramp & DC Braking, DC Braking with 0Hz detect, Timed DC Braking, Distance Stop
Accuracy	Output frequency resolution: 0.1 Hz Analog input 1: 11 bit Analog input 2: 11 bit Current: The resolution of the current feedback is 10 bit Accuracy: typical 2 % to 5 %
Communication & Interfaces	
Communications	RS-485 for Modbus RTU, NFC for app interface
Keypads	Fixed LED keypad, Remote RTC Keypad (available as an accessory) Remote IP66 Keypad (available as an accessory)
User software tools (free to download)	Connect (PC commissioning tool) Marshal (mobile app)
Inputs & Outputs	
Analog	2 x Analog input (can also be used as digital inputs) 0-10 V; 0-20 mA; 4-20 mA 1 x Analog output 0-10 V
Digital	4 x Digital inputs (1 frequency input) 1 x Digital input / output (can be used as a frequency or PWM output to represent analog value)
Relay	Positive or Negative input logic (PNP or NPN sensors) 1 x Relay (single pole, double throw relay)
Mounting & Environment	
IP rating	IP20
Storage temperature	-40 °C to 60 °C (-40 °F to 140 °F)
Operating temperature without de-rate	-10 °C to 40 °C (14 °F to 104 °F)
Operating temperature with de-rate	-10 °C to 60 °C (14 °F to 140 °F)
Cooling	Natural convection (frame 1 ≈ 0.55 kW / 0.75 hp), Cooling of power electronics via heat sink with integrated fan (all other drives)
Altitude	≤ 3000 m (1000 m / 3,280 ft to 3000 m / 9,840 ft derate 1 % over 100 m (328 ft))

Humidity	95 % non-condensing at 40 °C / 104 °F - EN61800-2(3k3)
Pollution	Pollution degree 2 - dry, non-conducting pollution only
Mounting methods	Click on/click off DIN rail mount, screw mount, 0 mm side by side

Standards

Approvals	C-Tick, EAC, KC, cUL, CE
EMC standards, radiated emissions and disturbance voltage (conducted emissions and radiated emissions when installed according to EMC requirements)	EN61800-3 category C3, 2nd environment (industrial premises):
	EN61800-3 category C1, 1st environment (domestic premises) for 1 200 V selected variants
	External EMC filters available for compliance to EN61800-3 category C1 & C2



Warranty

Free 5 year warranty (T&Cs apply)

Accessories

Remote interfaces	Remote keypad IP66, Remote keypad RTC, HMI
Filters & cables	External EMC filters, Fibre filter, Cable management bracket

Protection

DC Bus Undervoltage Error Level	100 V Drives = 175 V
	200 V Drives = 175 V
	400 V Drives = 330 V
DC Bus Overvoltage Error Level	100 V Drives = 415 V
	200 V Drives = 415 V
	400 V Drives = 830 V
Overcurrent limit	150 % Motor Rated Current (Programmable)
Motor Thermal Protection	Electronically protects the motor from over-heating due to loading conditions
Fire mode	A special operating mode of the drive when used in fan applications that is activated by a signal from the building's fire alarm system that specifically indicates a fire condition. The aim of Fire Mode is to maximise availability of the smoke control system used in a building for smoke extraction in the event of a fire. Once operating in Fire Mode the drive will run until it fails.
Keep running by default	Allows for continuous run during unusual loadings or operation conditions

Features

- PID Controller with threshold detection, feed forward and programmable slew-rate
- Catch an already spinning motor
- Low energy mode (dynamic voltage to frequency mode)
- Motor stability optimiser
- Programmable skip frequency
- Automatic reference & run/stop configurations
- S-ramps
- 4 configurable references
- Built in drive diagnostics
- Auto-reset
- Supply loss ride through
- Up to 12 kHz switching frequency
- Positive or Negative input logic (PNP or NPN sensors)
- Slip compensation
- Up/down reference (motorised potentiometer)
- Parameter cloning with Marshal or over ModbusRTU
- Fire mode
- Keep running by default


Documentation and downloads

Product documentation and PC tools available for download from:

www.controltechniques.com/support



COMMANDER S WIRING DIAGRAM

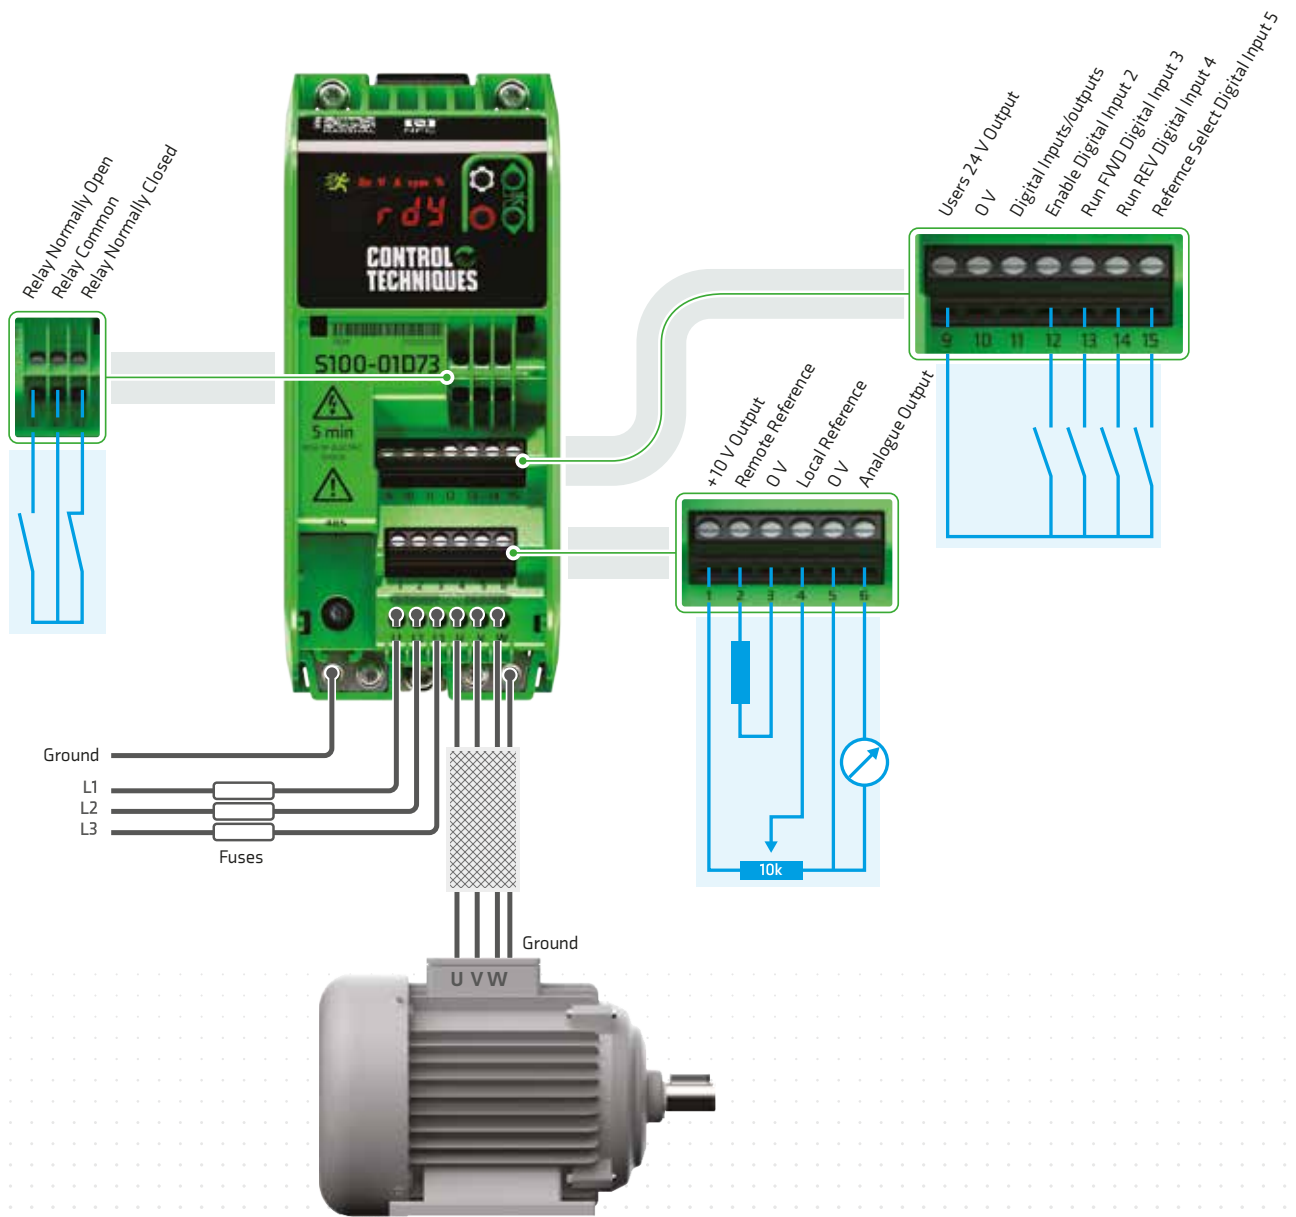

COMMANDER S ORDERING GUIDE

How to select a drive

Electrical Considerations

- What is the supply voltage?
- Single or three phase input power?
- What is the motor rating?
- Continuous current – FLA (Full Load Amps)
- Select the drive based on motor Amps rather than power rating

Frame 01

Frame 02

Frame 03




Dimensions



Model Number	Overall Dimensions							
	Height		Width		Depth		Weight	
	mm	in	mm	in	mm	in	kg	lb
S100-01	156	6.14	68	2.70	130	5.12	0.7	1.54
S100-02	192	7.56	68	2.70	132	5.20	0.8	1.76
S100-03	192	7.56	90	3.54	132	5.20	1.0	2.2

Commander S100 Mounting Dimensions

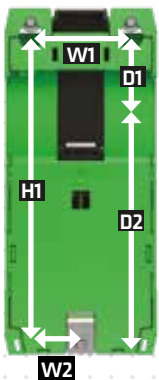

Model Number	H1		W1		W2		H2		H3		Mounting Hole Diameter	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
S100-01	145	5.71	45	1.77	22.5	0.89	40	1.56	105	3.66	4.8	0.19
S100-02	180	7.11	45	1.77	22.5	0.89	40	1.56	140	5.55	4.8	0.19
S100-03	180	7.11	65	2.56	37	1.48	40	1.56	140	5.55	4.8	0.19

COMMANDER S


MODEL NUMBER AND RATINGS

Product Code	Input Phases	Frame Size	Internal EMC Filter Performance	Heavy Duty		
				Max Cont. Current (A)	Motor Shaft Power (kW)	Motor Shaft Power (hp)
100/120 Vac +/-10%						
S100-01113-0A0000	1	01	C3	1.2	0.18	0.25
S100-01123-0A0000	1	01	C3	1.4	0.25	0.33
S100-01133-0A0000	1	01	C3	2.2	0.37	0.5
S100-03113-0A0000	1	03	C3	3.2	0.55	0.75
S100-03123-0A0000	1	03	C3	4.2	0.75	1
S100-03133-0A0000	1	03	C3	6	1.1	1.5
200/240 Vac +/-10%						
S100-01513-0A0000	1	01	C3	1.2	0.18	0.25
S100-01213-0A0000	3	01	C3	1.2	0.18	0.25
S100-01523-0A0000	1	01	C3	1.4	0.25	0.33
S100-01223-0A0000	3	01	C3	1.4	0.25	0.33
S100-01533-0A0000	1	01	C3	2.2	0.37	0.5
S100-01233-0A0000	3	01	C3	2.2	0.37	0.5
S100-01543-0A0000	1	01	C3	3.2	0.55	0.75
S100-01243-0A0000	3	01	C3	3.2	0.55	0.75
S100-01553-0A0000	1	01	C3	4.2	0.75	1
S100-01253-0A0000	3	01	C3	4.2	0.75	1
S100-01D63-0A0000	1 3	01	C3	6	1.1	1.5
S100-01D73-0A0000	1 3	01	C3	6.8	1.5	2
S100-03D13-0A0000	1 3	03	C3	9.6	2.2	3
380/480 Vac +/-10%						
S100-02413-0A0000	3	02	C3	1.2	0.37	0.5
S100-02423-0A0000	3	02	C3	1.7	0.55	0.75
S100-02433-0A0000	3	02	C3	2.2	0.75	1
S100-02443-0A0000	3	02	C3	3.2	1.1	1.5
S100-02453-0A0000	3	02	C3	3.7	1.5	2
S100-02463-0A0000	3	02	C3	5.3	2.2	3
S100-03413-0A0000	3	03	C3	7.2	3	3
S100-03423-0A0000	3	03	C3	8.8	4	5

Variants with C1 built-in EMC filter

Product Code	Input Phases	Frame Size	Internal EMC Filter Performance	Heavy Duty		
				Max Cont. Current (A)	Motor Shaft Power (kW)	Motor Shaft Power (HP)
200/240 Vac +/-10%						
S100-02S11-0A0000	1	02	C1	1.2	0.18	0.25
S100-02S21-0A0000	1	02	C1	1.4	0.25	0.33
S100-02S31-0A0000	1	02	C1	2.2	0.37	0.5
S100-02S41-0A0000	1	02	C1	3.2	0.55	0.75
S100-02S51-0A0000	1	02	C1	4.2	0.75	1
S100-02S61-0A0000	1	02	C1	6	1.1	1.5
S100-02S71-0A0000	1	02	C1	6.8	1.5	2

PRODUCT CODE STRUCTURE

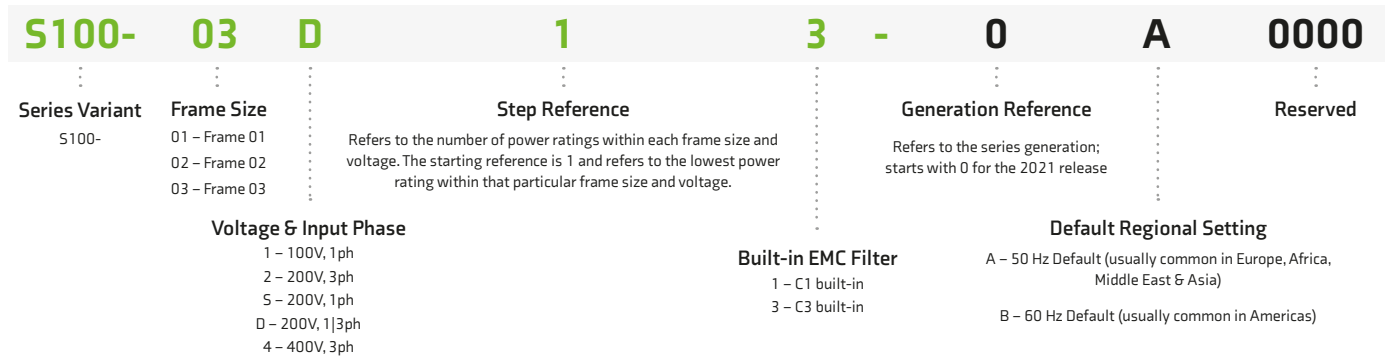

Note: The listed ordering codes are for 50 Hz default setting. For 60 Hz default setting change the ending digits from 0A0000 to 0B0000.

ACCESSORIES ORDERING GUIDE

Remote Interface		Product Code
Remote Keypad IP66		82500000000001
Remote keypad RTC		82400000019600
HMI		ESMART04-MCH040 ESMART07M-MCH070
Cable Management		Product Code
Cable Management Bracket		3470-0207
Fibre Filter		3880-0008

DRIVE OBSESSED



Control Techniques has been designing and manufacturing the best variable speed drives in the world since 1973.

Our customers reward our commitment to building drives that outperform the market. They trust us to deliver on time every time with our trademark outstanding service.

More than 45 years later, we're still in pursuit of the best motor control, reliability and energy efficiency you can build into a drive. That's what we promise to deliver, today and always.

1.4K+

Employees

70

Countries

#1 FOR ADVANCED

MOTOR AND DRIVE TECHNOLOGY



Nidec Corporation is a global manufacturer of electric motors and drives.

Nidec was set up in 1973. The company made small precision AC motors and had four employees. Today, it's a global corporation that develops, builds and installs cutting-edge drives, motors and control systems in over 70 countries with a workforce of more than 110,000.

You'll find its innovations in thousands of industrial plants, IoT products, home appliances, cars, robotics, mobile phones, haptic devices, medical apparatus and IT equipment all over the world.

109K

Employees

\$14.6B

Group Turnover

70+

Countries

330+

Companies



CONTROL TECHNIQUES IS YOUR GLOBAL DRIVES SPECIALIST.

With operations in over 70 countries, we're open for business wherever you are in the world.

For more information, or to find your local drive centre representatives, visit:

www.controltechniques.com

Connect with us



©2020 Nidec Control Techniques Limited. The information contained in this brochure is for guidance only and does not form part of any contract. The accuracy cannot be guaranteed as Nidec Control Techniques Ltd have an ongoing process of development and reserve the right to change the specification of their products without notice.

Nidec Control Techniques Limited. Registered Office: The Gro, Newtown, Powys SY16 3BE.

Registered in England and Wales. Company Reg. No. 01236886.

P.N. 0781-0440-02 04/21

