



Crossover Guide

Unimotor fm E2/U2 to
Unimotor fm E3/U3
Class-leading servo motor performance


Unimotor fm Servo Motors - E2/U2 migration to E3/U3 models

INTRODUCTION

The Unimotor fm servo motor family has recently been redesigned to utilize Emerson Industrial Automation's latest manufacturing and component design improvements. This redesign provides improved performance in a shorter length frame as compared to the previous design.

The following provides information to help identify these design improvements for those times when replacement of the previous design is necessary. Note that there are 100% mechanical mounting replacements for any existing field installed models. All previous order code information regarding bolt circle diameter, pilot diameter and shaft diameter are available in the new design's order string.

You will also see in the following information that there are higher performance specifications listed for most frames and lengths. Electrical parameters like, Kt (torque constant) and Ke (voltage constant) remained the same for the new models. This will allow for direct replacement into existing applications with no need to change motor parameters to maintain the existing performance levels. Only instances where increased motor performance levels are desired would changes to drive parameters be needed.

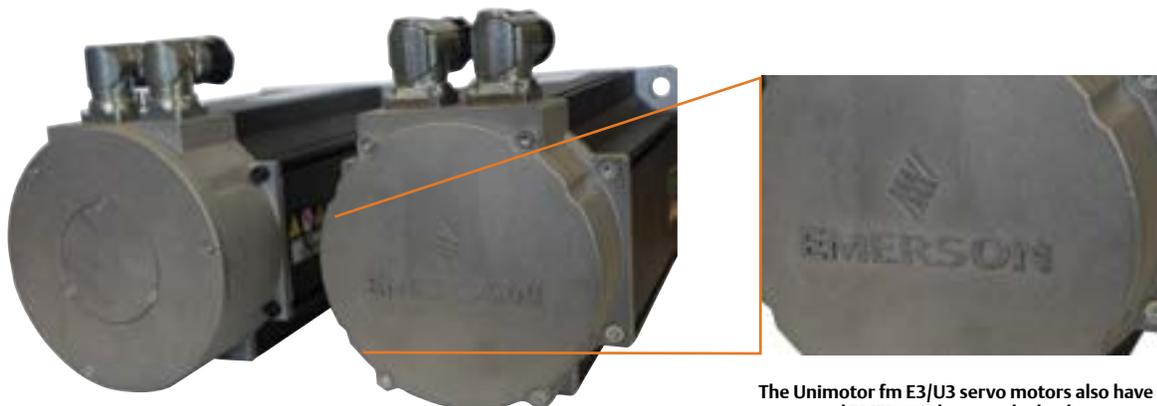

The Unimotor fm E3/U3 servo motors also have a raised EMERSON logo on the back cover.

Application specifics should be reviewed by an Emerson Application Engineer. For additional assistance call 1 800 893 2321.

Unimotor fm Servo Motors - E2/U2 migration to E3/U3 models

Crossover Reference Table

230 V E2		230 V E3	
Stall Torque (Nm)	Order Code	Order Code	Stall Torque (Nm)
2.2	075E2B400BACAA075110	075E3B400BACAA075110	2.7
4.3	095E2B300BACAA100190	095E3B300BACAA100190	4.5
4.3	095E2B400BACAA100190	095E3B400BACAA100190	4.5
7.5	095E2D300BACAA100190	095E3D300BACAA100190	7.9
7.5	095E2D400BACAA100190	095E3D400BACAA100190	7.9
9.4	115E2C300BACAA115190	115E3C300BACAA115190	10.8
12.4	115E2D300BACAA115240	115E3D300BACAA115240	13.7
15.3	115E2E300BACAA115240	115E3E300BACAA115240	23.4
460 V U2		460 V U3	
2.2	075U2B300BACAA075140	075U3B300BACAA075140	2.7
2.2	075U2B400BACAA075140	075U3B400BACAA075140	2.7
3.9	075U2D300BACAA075140	075U3D300BACAA075140	4.7
4.3	095U2B300BACAA100190	095U3B300BACAA100190	4.5
4.3	095U2B400BACAA100190	095U3B400BACAA100190	4.5
7.5	095U2D300BACAA100190	095U3D300BACAA100190	7.9
9	095U2E400BACAA100190	095U3E400BACAA100190	9.3
6.6	115U2B300BACAA115190	115U3B300BACAA115190	7.4
9.4	115U2C300BACAA115190	115U3C300BACAA115190	10.8
12.4	115U2D300BACAA115240	115U3D300BACAA115240	13.7
15.3	115U2E300BACAA115240	115U3E300BACAA115240	16.0
15.3	142U2C300BACAA165240	142U3C300BACAA165240	15.7
19.8	142U2D300BACAA165240	142U3D300BACAA165240	20.5
23.4	142U2E300BACAA165240	142U3E300BACAA165240	25.0
41.1	190U2D300BACAA215320	*190U3D300JACAA215320-SREL	44.5

*The -SREL suffix indicates a shaft dimension length of 80 mm. For 58 mm shaft length exclude the suffix.

Order Code Summary

XXX	X	X	X	XX	X	X	X	XX	X	XXX	XXX
Frame size	Motor voltage	Magnet type	Stator length	Rated speed (rpm x100)	Brake (24 V)	Connection type	Output shaft	Feedback device	Inertia + Temperature sensor	PCD	Shaft Diameter (mm)

Refer to the servo motor product literature for all available options.

Unimotor fm Servo Motors - E2/U2 migration to E3/U3 models

Order Code Changes

Unimotor fm frame sizes 075 mm, 095 mm, 115 mm, 142 mm

Use the following information as a guide to cross an existing Unimotor fm E2/U2 order code to the new E3/U3 order codes.

For motor frames 075, 095, 115 and 142 the new E3/U3 model string can be created simply by replacing the 5th character from the left from a “2” to a “3”.

For motor models provided with a holding brake, identified with a “1” in the 9th character, the new holding brake order code is now “5”.

Here is an example of these order code changes:

075U2B401BACAA075140
↓ ↓
075U3B405BACAA075140

Replace the 5th character from a “2” to a “3”.

Replace the 9th character from a “1” to a “5”.
If this position was previously a “0” it remains a “0” to represent a non-braked motor.

All other order code positions would remain the same when ordering a replacement motor in these frames.

Unimotor fm frame size 190 mm

For the 190 frame motor the same applies as shown for the 075-142 models. In addition to these changes a “-SREL” suffix is required to indicate the required shaft length. The standard shaft on all Unimotor fm 190 E3/U3 frame lengths is now 32 mm diameter by 58 mm long. When replacing an existing Unimotor fm 190 E2/U2 model use the suffix “-SREL” on the order string to indicate the 32 mm diameter by 80 mm long shaft dimensions associated with the E2/U2 models.

Here is an example of this order code change:

190U2D300BACAA215320
↓ ↓
190U3D300JACAA215320-SREL

Replacing the 5th character from a “2” to a “3”

In this example the motor is a non-brake version, the 9th character would remain a “0”

Add the suffix “-SREL” to indicate the need for the 32mm diameter by 80mm long shaft

The “connection type” order code has changed from “B” to “J”.

This change has been only been made to the order code, the physical connector remains the same, size 1.5

Application specifics should be reviewed by an Emerson Application Engineer. For additional assistance call 1 800 893 2321.

Unimotor fm Servo Motors - E2/U2 migration to E3/U3 models

Motor Dimension Changes


With the new E3/U3 models the motor length decreases on some of the frames. Along with this shorter motor length also comes a difference in the connector position relative to the motor faceplate. With the shorter motor the cable connectors move closer to the motor faceplate.

Connector Position and Motor Length Differences

Unimotor E3/U3 Frame	Connector Position Difference from U2/E2 (mm)		Motor Length Difference from E2/U2 (mm)	
	Non-Brake	Braked	Non-Brake	Braked
075A-D	0	-15	0	-15
095A-E	0	-15	0	-15
115A-E	-8.2	-23.2	1.4	-13.6
142A-E	-25	-10	-33.4	-18.4
190 A	-28.6	-19.4	-38	-28.6
190B	-25.5	-16.4	-34.9	-25.8
190C	-22.7	-13.3	-31.9	-22.7
190D	-19.4	-10.3	-28.8	-19.7
190E	-16.4	-7.2	-25.8	-16.6
190F	-13.3	-4.2	-22.7	-13.6
190G	-10.3	-1.1	-19.7	-10.5
190H	-7.2	1.9	-16.6	-7.5

Differences to Note:

- With the shorter motor the cable connectors move closer to the motor faceplate
- Along with this shorter motor length also comes a difference in the connector position relative to the motor faceplate

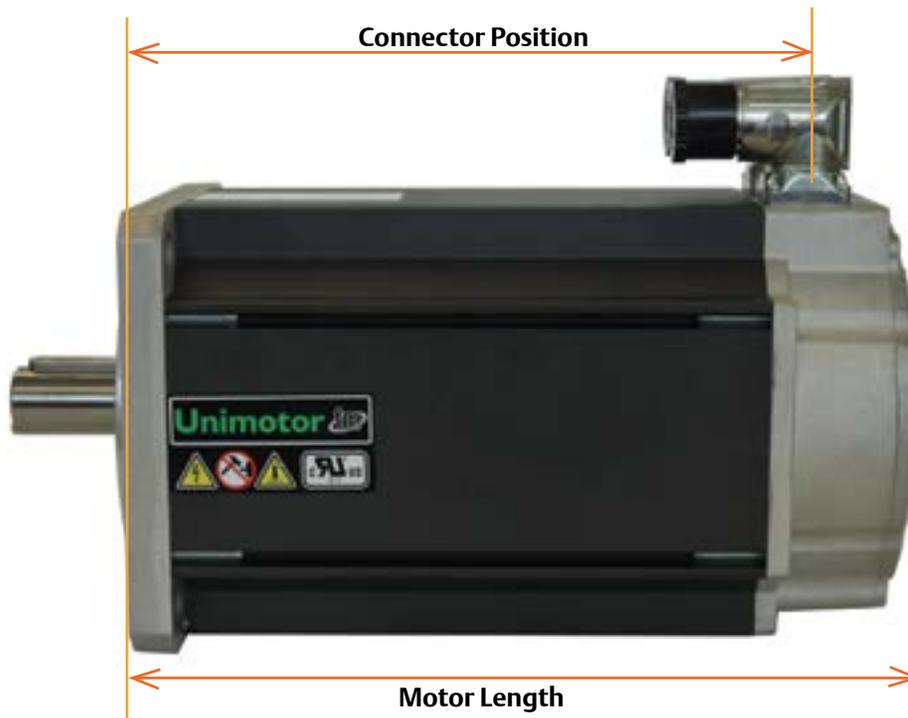

Application specifics should be reviewed by an Emerson Application Engineer. For additional assistance call 1 800 893 2321.


Unimotor fm Servo Motors - E2/U2 migration to E3/U3 models

Motor Parameters

Higher Torque ratings

The Cross Reference Table (page 3), shows in some cases that the stall torque of the E3/U3 models has increased. Although this higher performance is available, it is not available to the application unless the servo drive has a sufficient current rating and the appropriate drive parameters are set to the new motor data. Keep in mind that if the previous E2/U2 motor was providing the required torque there is no need to change the existing drive settings, the new E3/U3 motor and existing drive will provide the equivalent performance.

If the higher rating is needed use the motor name plate data to determine the information to enter for the new motor parameters.

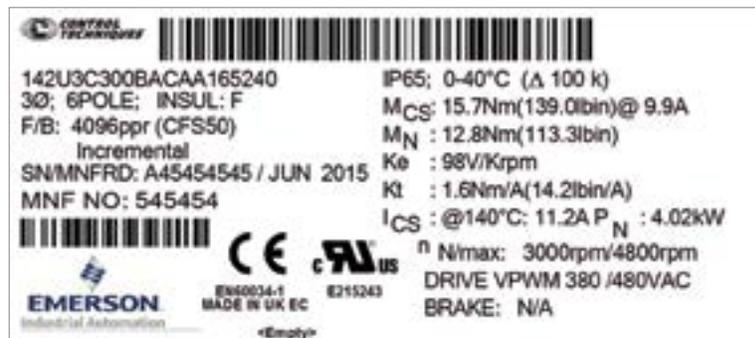

Use the following three steps to update the drives motor map information.

1. Use the appropriate commissioning software and update the motor information as indicated on the motor nameplate.
2. Verify that the motor feedback device settings in the drive match the motors feedback device.
3. Perform a rotating Autotune de-coupled from the load as described in the appropriate drive product literature.
4. Save the new drive parameters.

Application specifics should be reviewed by an Emerson Application Engineer. For additional assistance call 1 800 893 2321.

Notes

Control Techniques™

Leroy-Somer™

www.emersonindustrial.com



EMERSON™
Industrial Automation

© 2015 Emerson Electric Co. The information contained in this brochure is for guidance only and does not form part of any contract. The accuracy cannot be guaranteed as Emerson have an ongoing process of development and reserve the right to change the specification of their products without notice.